

ProTaQ™



System Description >




ProTaQ™ is cold applied tape coating system designed for Corrosion Protection in non-open water situations. For example Harbor Situation, Bay or similar.

It is suitable for polyurethane infill and marine mastic infill. It allows application without primer.



System Features >

- Good conformability and consistent uniform thickness.
- Easily applied with no special equipment.
- Excellent resistance to cathodic disbondment.
- Excellent resistance salt ,acid, alkali and microorganism
- Excellent resistance abrasion, impact, hydrostatic pressure.

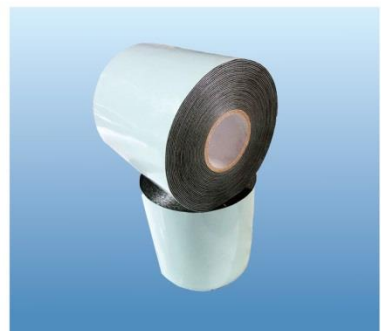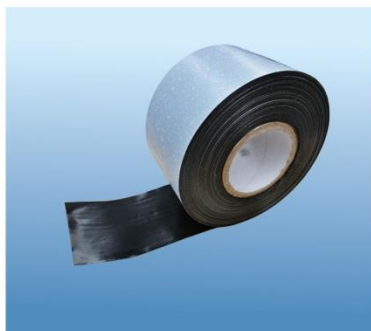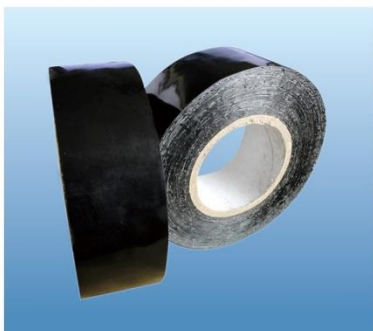

	MT100
Tape thickness	1.0mm or others
Width	50mm, 100mm,150mm,225mm or others
Length	10m、 30m or others

Property	Test Method	Standard
Thickness	ASTM D1000	1.0mm
Adhesion to Self (18°C)	ASTM D1000	2.52 N/mm
Tensile Strength	ASTMD1000	>5kg/ m ²
Elongation	ASTM D638	>300%
Impact Resistance	ASTM G13	>24 Drops(2 layers)
Application Temperature (tested up to+55°C)		Pass
Service Temperature (tested up to +85°C)		Pass

IO Setia Ventures

IO SETIA VENTURES SDN BHD (383695-M)
 B-7-7 Block B
 Jalan Ostia Utama
 Ostia Bangi Business Park
 43650 Bandar Baru Bangi
 Selangor

Tel : +603 8922 9261/2
 Fax : +603 8922 9260
 Email : sales@iosv.com.my